

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/014719 A2

- (51) International Patent Classification⁷: **B63B** LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/IB2003/003883
- (22) International Filing Date: 7 August 2003 (07.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0218510.6 9 August 2002 (09.08.2002) GB
- (71) Applicant: PENTECOST, William, Francis [GB/GB]; Sandpoint Marina, Woodyard Road, Dumbarton G82 4BG (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:
— of inventorship (Rule 4.17(iv)) for US only
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SWALLOW TAILED BOAT HULL

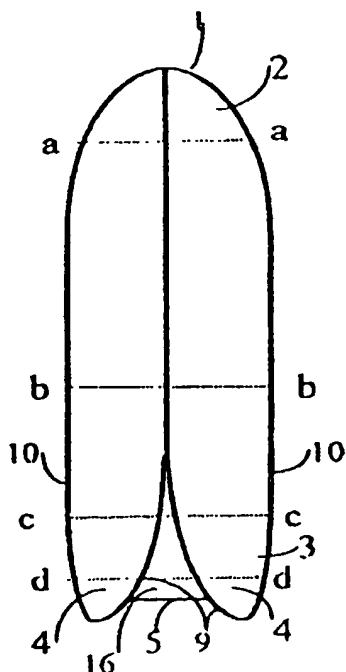

(57) Abstract: A water craft where the hull (1) divides in the aft section from or near the central fore and aft line of the craft and sweeping out toward the beam (10) of the craft on both sides so that a roofed (16) swallow tail (4) is formed with its widest separation toward the stern of the craft allowing smooth motion through the water while providing maximum stability. Preferably there is a sharp edge (8) where the wall of the swallow tail (9) meets the bottom of the boat. The edge may curve sharply outward toward the stern to provide for quicker planing ability. The transom (5) may be recessed into the swallow tail providing a short roofed section between the wings of the swallow tail (4) or the roofed section may continue right to the stern. The area between the swallow tails (4) and the roofed section may form a protected area to house a variety of features.

WO 2004/014719 A2